



Flat







[Griffe]
Flat
Design Andrea Crosetta
informazioni tecniche
technical details
données techniques
technische Daten
informaciones técnicas
Page 70-71




FLAT - V design Andrea Crosetta

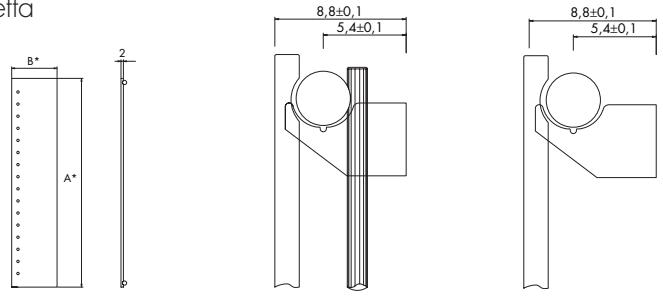


[X] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar

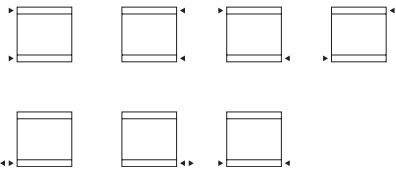

[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



[B5] attacco interasse 5 cm
pipe centres 5 cm
raccords 5 cm
5 cm Achsabstand Anschluss
conexión entre ejes: 5 cm.



P* 150

A* cm	in	B* cm	in	l* cm	in	l* cm	in	art*	BTU Δt 50°	watt Δt 50°
verticale / vertical / verticale / vertikal / vertical										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000S170015	2 038	598
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000S170020	2 717	797
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000S170027	3 669	1 076
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000S200015	2 365	694
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000S200020	3 154	925
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000S200027	4 258	1 249
verticale doppio / double vertical / double verticale / doppelte vertikal / vertical doble										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000D170015	3 058	897
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000D170020	4 076	1 195
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000D170027	5 502	1 614
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000D200015	3 541	1 038
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000D200020	4 719	1 384
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000D200027	6 373	1 869
INOX										
A* cm	in	B* cm	in	l* cm	in	l* cm	in	art*	BTU Δt 50°	watt Δt 50°
verticale / vertical / verticale / vertikal / vertical										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FL13000S170015R	1 910	560
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FL13000S170020R	2 547	747
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FL13000S170027R	3 440	1 009
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FL13000S200015R	2 217	650
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FL13000S200020R	2 956	867
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FL13000S200027R	3 992	1 171

A* = altezza / height / hauteur / Höhe / alto B* = larghezza / width / longueur / Breite / ancho art* = articolo / model / modèle / Artikel / artículo P* = pagina / page / page / Seite / página
l* = interasse / pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones



Ulteriori dettagli
Further details
Ulérieures détails
Weitere Einzelheiten
Otros detalles


P* 148

Colori / colours / couleurs / Farbe / colores


[BIAN] B standard
T + 10%
S + 20%
[RAL] S + 20%
RAL non inclusi in tabella
special Ral colours
couleurs Ral spéciales
RAL Farbe nicht in der Tabelle inbegriffen
colores RAL especiales

Kcal = Watt x 0,860
BTU = Watt x 3,413


Watt Δt 60° = Watt Δt 50° x 1,264
Watt Δt 40° = Watt Δt 50° x 0,750
Watt Δt 30° = Watt Δt 50° x 0,518
Watt Δt 20° = Watt Δt 50° x 0,307

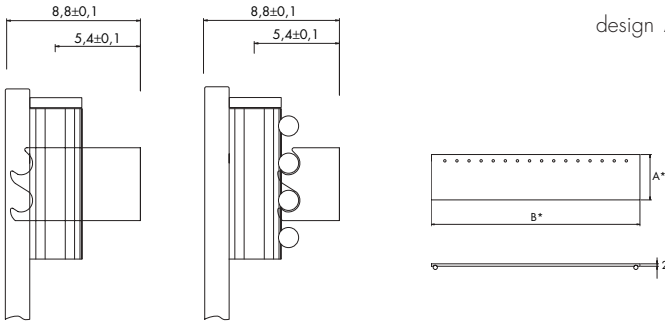


[X] attacco standard
standard connection
raccord standard
standard Anschluss
conexión estándar

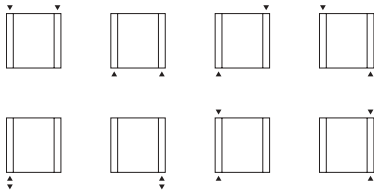

[B] attacco speciale
special connection
raccord spéciale
speziell Anschluss
conexión especial



[B5] attacco interasse 5 cm
pipe centres 5 cm
raccords 5 cm
5 cm Achsabstand Anschluss
conexión entre ejes: 5 cm.



P* 150

B* cm	in	A* cm	in	l* cm	in	l* cm	in	art*	BTU Δt 50°	watt Δt 50°
orizzontale / horizontal / horizontale / horizontal / horizontal										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000S170015	2 234	655
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000S170020	2 976	873
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000S170027	4 018	1 178
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000S200015	2 627	770
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000S200020	3 503	1 027
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000S200027	4 728	1 386
orizzontale doppio / double horizontal / double horizontale / doppelte horizontal / horizontal doble										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000D170015	3 740	1 097
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000D170020	5 115	1 500
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000D170027	6 424	1 884
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000D200015	4 400	1 290
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000D200020	6 018	1 765
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000D200027	7 557	2 216
INOX										
B* cm	in	A* cm	in	l* cm	in	l* cm	in	art*	BTU Δt 50°	watt Δt 50°
orizzontale / horizontal / horizontale / horizontal / horizontal										
172.5	67.9	37.5	14.8	45.8	18.0	166	65.4	FO13000S170015X	2 095	614
172.5	67.9	49.5	19.5	57.8	22.8	166	65.4	FO13000S170020X	2 790	818
172.5	67.9	66.3	26.1	74.6	29.4	166	65.4	FO13000S170027X	3 767	1 105
202.5	79.7	37.5	14.8	45.8	18.0	196	77.2	FO13000S200015X	2 463	722
202.5	79.7	49.5	19.5	57.8	22.8	196	77.2	FO13000S200020X	3 284	963
202.5	79.7	66.3	26.1	74.6	29.4	196	77.2	FO13000S200027X	4 432	1 300

A* = altezza / height / hauteur / Höhe / alto B* = larghezza / width / longueur / Breite / ancho art* = articolo / model / modèle / Artikel / artículo P* = pagina / page / page / Seite / página
l* = interasse / pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones

Kcal = Watt x 0,860
BTU = Watt x 3,413

Watt Δt 60° = Watt Δt 50° x 1,264
Watt Δt 40° = Watt Δt 50° x 0,750
Watt Δt 30° = Watt Δt 50° x 0,518
Watt Δt 20° = Watt Δt 50° x 0,307

Colori / colours / couleurs / Farbe / colores

[BIAN] B standard
T + 10%
S + 20%
[RAL] S + 20%
RAL non inclusi in tabella
special Ral colours
couleurs Ral spéciales
RAL Farbe nicht in der Tabelle inbegriffen
colores RAL especiales

Ulteriori dettagli
Further details
Ulérieures détails
Weitere Einzelheiten
Otros detalles



P* 148